


HISAKA

Your Automation Solutions Provider


螺杆 / 螺母支撑座
Ball Screw Brackets



▶ EK

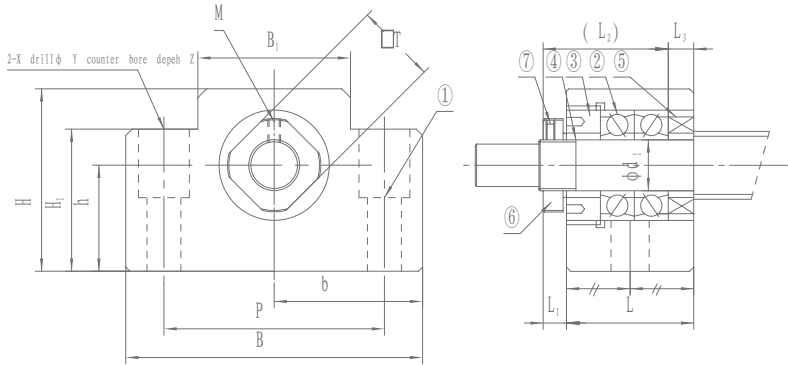

EK06-EK08


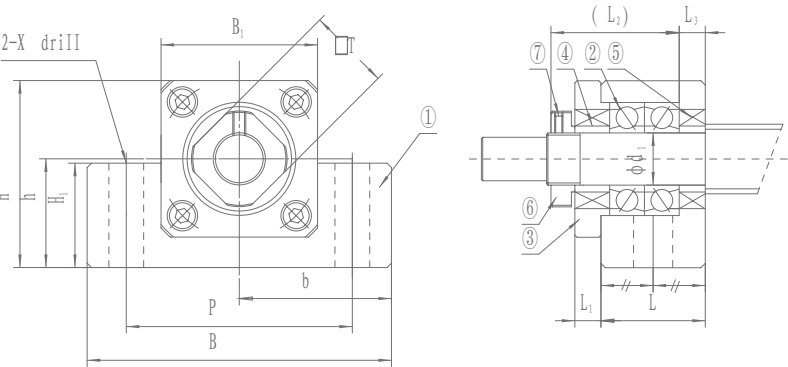


EK10-EK20

- EK05-Ek08 C7 级使用 6 字头轴承，轴向需轻负荷，间隙约 0.03mm。（欲订此规格请先洽询技术资料）
- EK10-EK20 C7 级使用之 7 字头轴承无预压处理，轴向最大间隙 0.018mm
- C5 级使用之轴承经预压处理，轴向 0 间隙
- 轴承皆采用日系品牌大厂
- Using deep groove ball bearings for EK05 to EK08 C7 types Support Units,Which only be applied to light load,and Max.axial clearance is around 0.03mm.
- Using angular contact ball bearings without preload for EK10 to EK20 C7 types Support Units,and Max.axial clearance is 0.018mm.
- Bearings make Preload for C5 type support units,and Axial clearance is 0mm.
- All of bearings use Japan's brand bearings.

型号 Model No.	轴径 Shaft diameter d	L	L1	L2	L3	B	H	b ±0.02	h ±0.02	B1	H1	P	X	Y	Z	M	T
EK05	5	16.5	5.5	18.5	3.5	36	21	18	11	20	8	28	4.5	-	-	M3	11
EK06	6	20	5.5	22	3.5	42	25	21	13	18	20	30	5.5	9.5	11	M3	12
EK08	8	23	7	26	4	52	32	26	17	25	26	38	6.8	11	12	M3	14
EK10	10	24	6	29.5	6	70	43	35	25	36	24	52	9	-	-	M3	16
EK12	12	24	6	29.5	6	70	43	35	25	36	24	52	9	-	-	M4	19
EK15	15	25	6	36	5	80	49	40	30	41	25	60	11	-	-	M4	22
EK20	20	42	10	50	10	95	58	47.5	30	56	25	75	11	-	-	M4	30

▶ EF

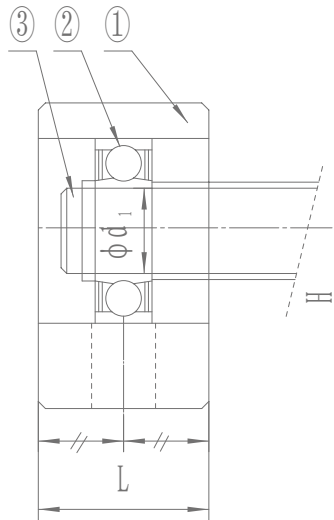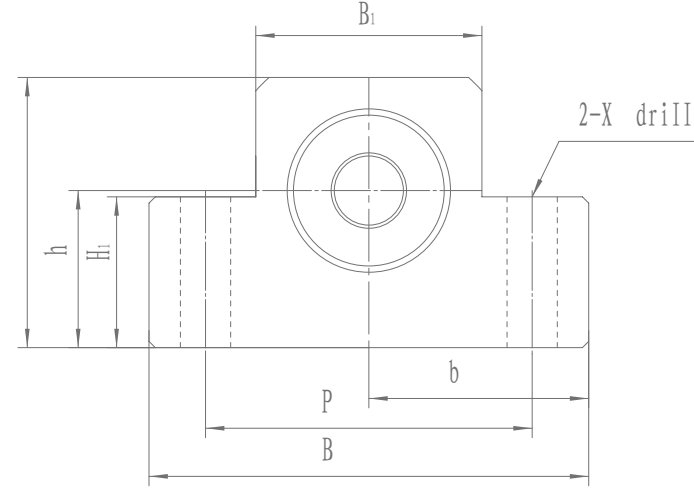


型号 Model No.	部品名称 Part name	数量 Qty
1	轴承座本体 /Housing	1
2	轴承 /Bearing	1 组 /1 set
3	C 型扣环 /Snap ring	1

型号 Model No.	轴径 Shaft diameter d	L	B	H	b ±0.02	h ±0.02	B1	H1	P	X	Y	Z	使用轴承 Bearing	使用 C 型扣环 Snap ring
EF06	6	12	42	25	21	13	18	20	30	5.5	9.5	11	606ZZ	S 06
EF08	6	14	52	32	26	17	25	26	38	6.6	11	12	606ZZ	S 06
EF10	8	20	70	43	35	25	36	24	52	9	-	-	608ZZ	S 08
EF12	10	20	70	43	35	25	36	24	52	9	-	-	6000ZZ	S 10
EF15	15	20	80	49	40	30	41	25	60	9	-	-	6002ZZ	S 15
EF20	20	26	95	58	47.5	30	56	25	75	11	-	-	6204ZZ	S 20

螺杆、螺母支撑座

螺杆、螺母支撑座

▶ BK

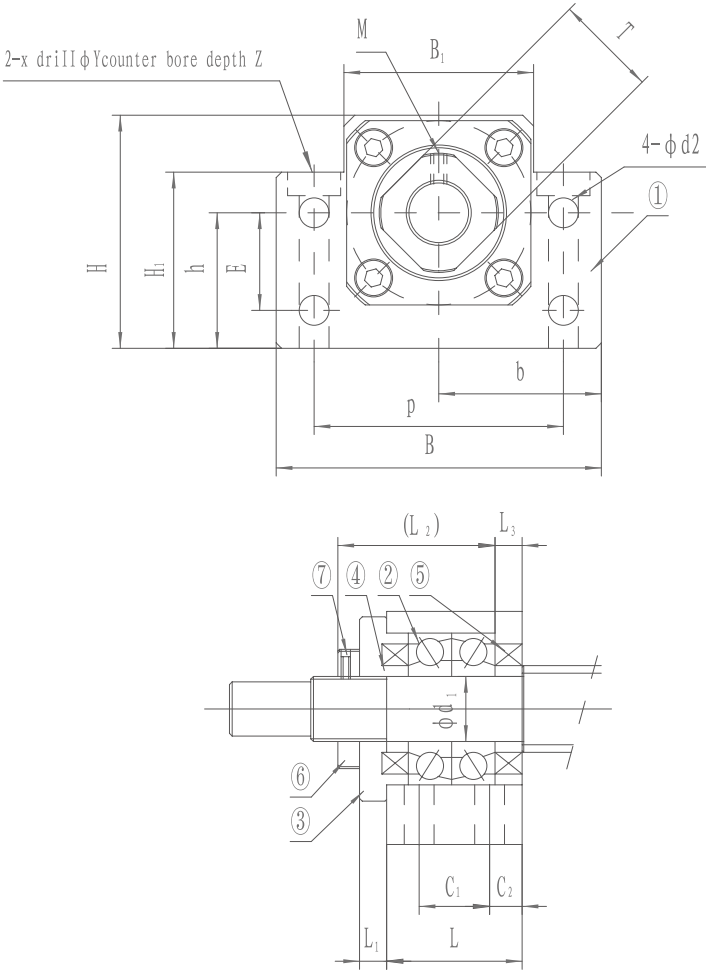


型号 Model No.	部品名称 Part name	数量 Qty
1	轴承座本体 /Housing	1
2	轴承 /Bearing	1 组 /1 set
3	压板 /Holding lid	1
4	间隔圈 /Collar	2
5	轴封 /Seal	1(2)
6	锁固螺帽 /Lock nut	1
7	内六角止付螺丝付铜片 / Hexagon socket-head Setscrew(with set piece)	2

- C7 级使用之 7 字头轴承无预压处理，轴向最大间隙 0.018mm
 - C5 级使用之轴承经预压处理，轴向 0 间隙
 - 轴承皆采用日系品牌大厂
- Using angular contact ball bearings without preload for C7 types Support Units,and Max.axial clearance is 0.018mm.
 - Bearings make Preload for C5 type support units,and Axial clearance is 0mm.
 - All of bearings use Japan's brand bearings.

型号 Model No.	轴径 Shaft diameter d	L	L1	L2	L3	B	H	b ±0.02	h ±0.02	B1	H1	E	P	C1	C2	d2	X	Y	Z	M	T
BK10	10	25	5	29	5	60	39	30	22	34	32.5	15	46	13	6	5.5	6.6	10.8	5	M3	16
BK12	12	25	5	29	5	60	43	30	25	34	32.5	18	46	13	6	5.5	6.6	10.8	1.5	M4	19
BK15	15	27	6	32	6	70	48	35	28	40	38	18	54	15	6	5.5	6.6	11	6.5	M4	22
BK17	17	35	9	44	7	86	64	43	39	50	55	28	68	19	8	6.6	9	14	8.5	M4	24
BK20	20	35	8	43	8	88	60	44	34	52	50	22	70	19	8	6.6	9	14	8.5	M4	30
BK25	25	42	12	54	9	106	80	53	48	64	70	33	85	22	10	9	11	17	11	M5	35
BK30	30	45	14	61	9	128	89	64	51	76	78	33	102	23	11	11	14	20	13	M6	40
BK35	35	50	14	67	12	140	96	70	52	88	79	35	114	26	12	11	14	20	13	M8	50
BK40	40	61	18	76	15	160	110	80	60	100	90	37	130	33	14	14	18	26	17.5	M8	50

▶ BF

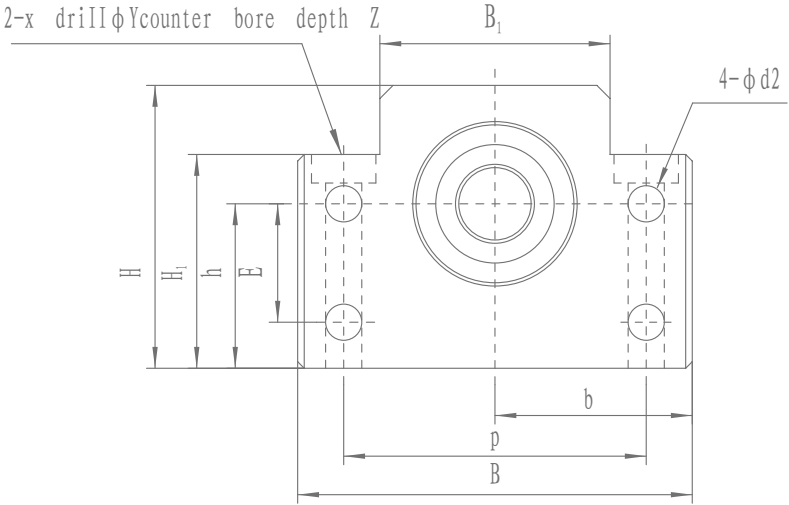


型号 Model No.	部品名称 Part name	数量 Qty
1	轴承座本体 /Housing	1
2	轴承 /Bearing	1 组 /1 set
3	C 型扣环 /Snap ring	1

- 染黑使用之轴承采用变铁蓝
 - 化学镍使用之轴承采用双塑料盖
 - 轴承皆采用日系品牌大厂
- It is used double pressed steel cages for Black Oxide type support units.
 - It is used double plastic cages for Electroless Nickel Plating type support units.
 - All of bearings use Japan's brand bearings.


型号 Model No.	轴径 Shaft diameter d	L	B	H	b ±0.02	h ±0.02	B1	H1	E	P	d2	X	Y	Z	使用轴承 Bearing	使用 C 型扣环 Snap ring
BF10	8	20	60	39	30	22	34	32.5	15	46	5.5	6.6	10.8	5	608ZZ	S 08
BF12	10	20	60	43	30	25	34	32.5	18	46	5.5	6.6	10.8	1.5	6000ZZ	S 10
BF15	15	20	70	48	35	28	40	38	18	54	5.5	6.6	11	6.5	6002ZZ	S 15
BF17	17	23	86	64	43	39	50	55	28	68	6.6	9	14	8.5	6203ZZ	S 17
BF20	20	26	88	60	44	34	52	50	22	70	6.6	9	14	8.5	6004ZZ	S 08
BF25	25	30	106	80	53	48	64	70	33	85	9	11	17	11	6205ZZ	S 25
BF30	30	32	128	89	64	51	76	78	33	102	11	14	20	13	6206ZZ	S 30
BF35	35	32	140	96	70	52	88	79	35	114	11	14	20	13	6207ZZ	S 35
BF40	40	37	160	110	80	60	100	90	37	130	14	18	26	17.5	6208ZZ	S 40



FK

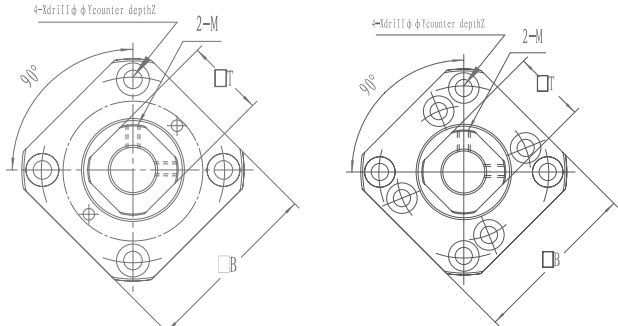



型号 Model No.	部品名称 Part name	数量 Qty
1	轴承座本体 /Housing	1
2	轴承 /Bearing	1 组 /1 set
3	压板 /Holding lid	1
4	间隔圈 /Collar	2
5	轴封 /Seal	2
6	锁固螺帽 /Lock nut	1 组 /1 set
7	内六角止付螺丝付铜片 / Hexagon socket-head Setscrew(with set piece)	2

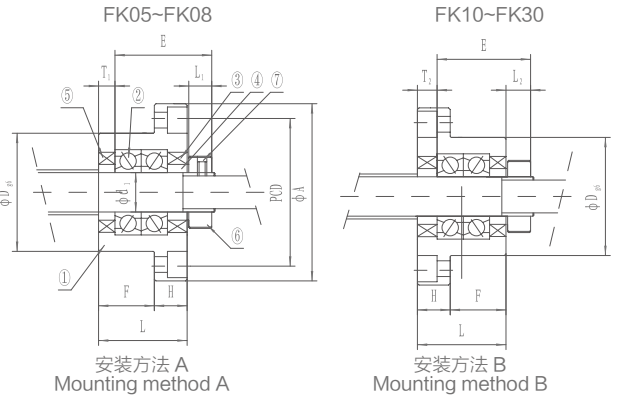

型号 Model No.	轴径 Shaft diameter d	L	H	F	E	Dg6	A	PDC	B	装置方法 A				X	Y	Z	M	T
										L1	T1	L2	T2					
FK04	4	15	6	9	17.5	20 ^{-0.007 -0.02}	32	24	25	5	3	3.4	5	3.4	6.5	4	M3	11
FK05	5	16.5	6	10.5	18.5	20 ^{-0.007 -0.02}	34	26	26	5.5	3.5	7	5	3.4	6.5	4	M3	11
FK06	6	20	7	13	22	20 ^{-0.007 -0.02}	36	28	28	5.5	3.5	8.5	6.5	3.4	6.5	4	M3	12
FK08	8	23	9	14	26	28 ^{-0.007 -0.02}	43	35	35	7	4	10	7	3.4	6.5	4	M3	14
FK10	10	27	10	17	29.5	34 ^{-0.009 -0.025}	52	42	42	7.5	5	8.5	6	4.5	8	4	M3	16
FK12	12	27	10	17	29.5	36 ^{-0.009 -0.025}	54	44	44	7.5	5	8.5	6	4.5	8	4	M4	19
FK15	15	32	15	17	36	40 ^{-0.009 -0.025}	63	50	52	10	6	12	8	5.5	9.5	6	M4	22
FK17	17	45	22	23	47	50 ^{-0.009 -0.025}	77	62	61	11	9	14	12	6.6	11	10	M4	24
FK20	20	52	22	30	50	57 ^{-0.010 -0.029}	85	70	68	8	10	12	14	6.6	11	10	M4	30
FK25	25	57	27	30	60	63 ^{-0.010 -0.029}	98	80	79	13	10	20	17	9	15	13	M5	35
FK30	30	62	30	32	61	75 ^{-0.010 -0.029}	117	95	93	11	12	17	18	11	17.5	15	M6	40



FF

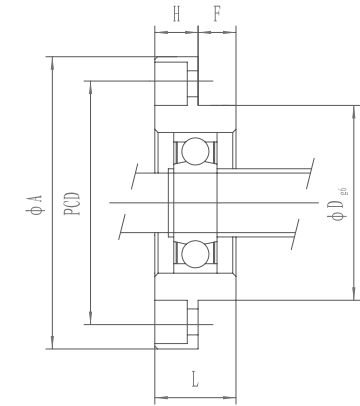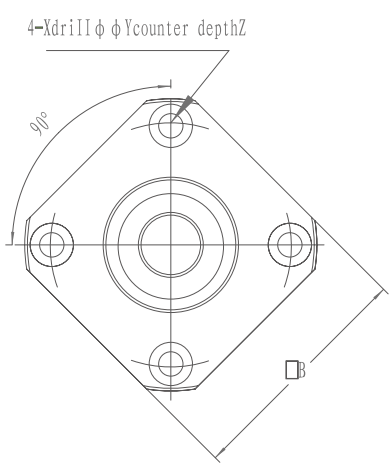



型号 Model No.	部品名称 Part name	数量 Qty
1	轴承座本体 /Housing	1
2	轴承 /Bearing	1 组 /1 set
3	压板 /Holding lid	1

型号 Model No.	轴径 Shaft diameter d	L	H	F	Dg6	A	PDC	B	X	Y	Z	使用轴承 Bearing	使用 C 型扣环 Snap ring
FF06	6	10	6	4	22 ^{-0.007 -0.02}	36	28	28	3.4	6.5	4	606ZZ	S 06
FF10	8	12	7	5	28 ^{-0.007 -0.02}	43	35	35	3.4	6.5	4	608ZZ	S 08
FF12	10	15	7	8	34 ^{-0.009 -0.025}	52	42	42	4.5	8	4	6000ZZ	S 10
FF15	15	17	9	8	40 ^{-0.009 -0.025}	63	50	52	5.5	9.5	5.5	6002ZZ	S 15
FF17	17	20	11	9	50 ^{-0.009 -0.025}	77	62	61	6.6	11	6.5	6203ZZ	S 17
FF20	20	20	11	9	57 ^{-0.010 -0.029}	85	70	68	6.6	11	6.5	6204ZZ	S 20
FF25	25	24	14	10	63 ^{-0.010 -0.029}	98	80	79	9	14	8.5	6205ZZ	S 25
FF30	30	27	18	9	75 ^{-0.010 -0.029}	117	95	93	11	17	11	6206ZZ	S 30


螺杆
螺母支撑座

螺杆
螺母支撑座


▶ AK

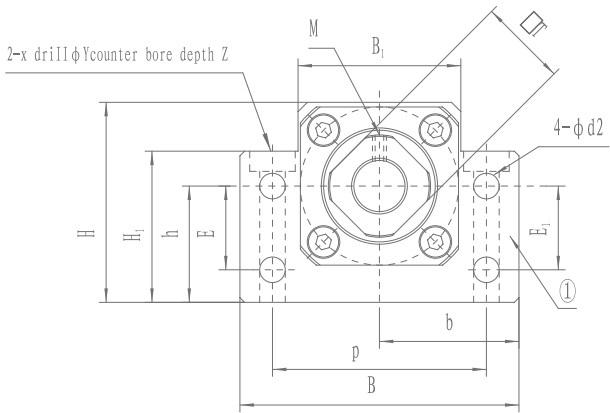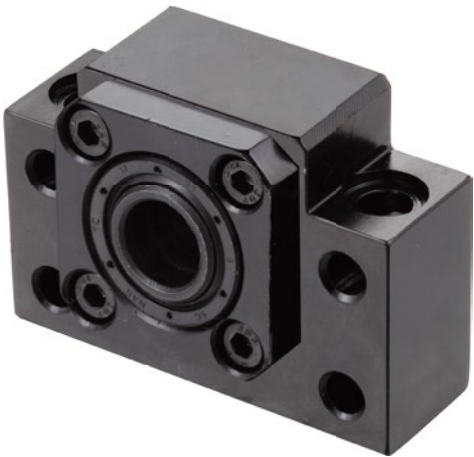

AK10~AK20

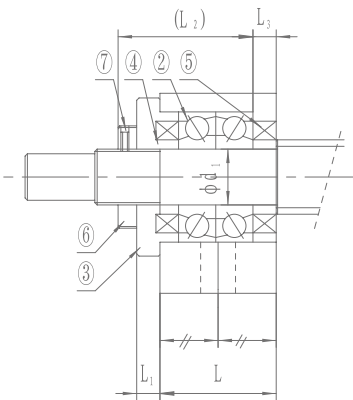

AK10~AK15


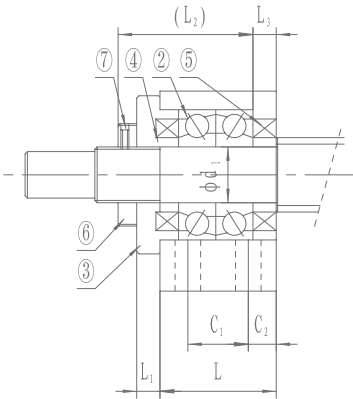


AK20

型号 Model No.	部品名称 Part name	数量 Qty
1	轴承座本体 /Housing	1
2	轴承 /Bearing	1 组 /1 set
3	压板 /Holding lid	1
4	间隔圈 /Collar	2
5	轴封 /Seal	2
6	锁固螺帽 /Lock nut	1 组 /1 set
7	内六角止付螺丝付铜片 / Hexagon socket-head Setscrew(with set piece)	2

型号 Model No.	轴径 Shaft diameter d	L	L1	L2	L3	B	H	b ±0.02	h ±0.02	B1	H1	E1	P	d2	X	Y	Z	M	T	E	C1	C2
AK10	10	24	6	29.5	6	70	43	35	25	36	35	19	52	6.6	9	14	11	M3	16	15	-	-
AK12	12	24	6	29.5	6	70	43	35	25	36	35	19	52	6.6	9	14	11	M4	19	15	-	-
AK15	15	25	6	36	5	80	49	40	30	41	40	19	60	6.6	11	17	15	M4	22	15	-	-
AK20	20	42	10	50	10	95	58	47.5	30	56	45	19	75	6.6	11	17	15	M4	30	15	22	10


▶ AF

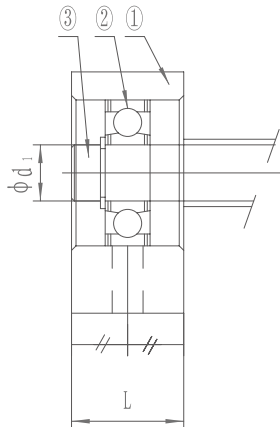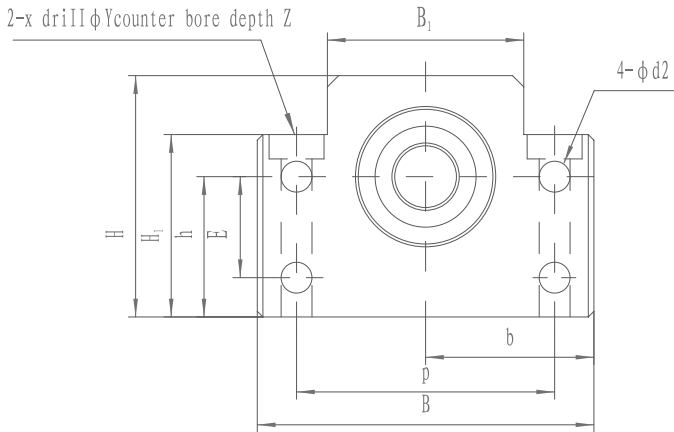

型号 Model No.	部品名称 Part name	数量 Qty
1	轴承座本体 /Housing	1
2	轴承 /Bearing	1 组 /1 set
3	压板 /Holding lid	1

型号 Model No.	轴径 Shaft diameter d	L	B	H	b ±0.02	h ±0.02	B1	H1	E1	P	d2	X	Y	Z	E	使用轴承 Bearing	使用 C 型扣环 Snap ring
AF10	8	20	70	43	35	25	36	35	19	52	6.6	9	14	11	15	608ZZ	S 08
AF12	10	20	70	43	35	25	36	35	19	52	6.6	9	14	11	15	6000ZZ	S 10
AF15	15	20	80	49	40	30	41	40	19	60	6.6	9	14	11	15	6002ZZ	S 15
AF20	20	26	95	58	47.5	30	56	45	19	75	6.6	11	17	15	15	6204ZZ	S 20



▶ RN

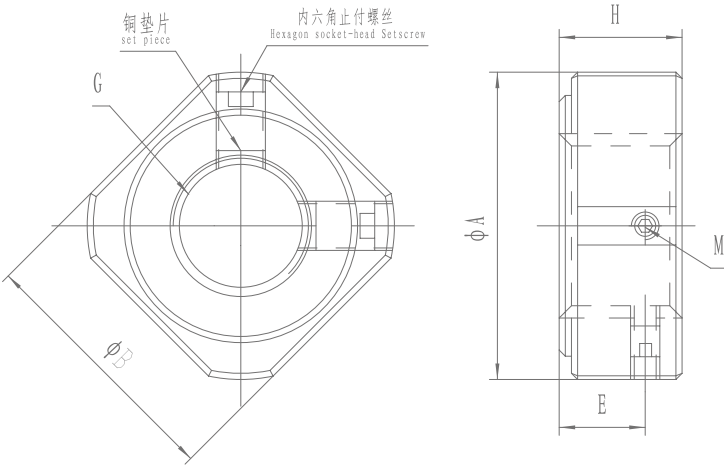

型号 Model No.	部品名称 Part name	数量 Qty
6	锁固螺帽 /Lock nut	1 组 /1 set
7	内六角止付螺丝付铜片 / Hexagon socket-head Setscrew(with set piece)	2

型号 Model No.	H	A	E	M	B	G
RN05	5	12.5	2.7	M3×0.5	11	M5×0.5
RN05-N	5	12.5	2.7	M3×0.5	11	M5×0.5
RN06	5	13.5	2.7	M3×0.5	12	M6×0.75
RN06-N	5	13.5	2.7	M3×0.5	12	M6×0.75
RN08	6.5	16	4	M3×0.5	14	M8×1.0
RN08-N	6.5	16	4	M3×0.5	14	M8×1.0
RN10	8	19	5.5	M3×0.5	16	M10×1.0
RN10-N	8	19	5.5	M3×0.5	16	M10×1.0
RN12	8	22	5.5	M4×0.7	19	M12×1.0
RN12-N	8	22	5.5	M4×0.7	19	M12×1.0
RN15	8	25	4.75	M4×0.7	22	M15×1.0
RN15-N	8	25	4.75	M4×0.7	22	M15×1.0
RN17	13	29	9	M4	24	M17×1.0
RN17-N	13	29	9	M4	24	M17×1.0
RN20	11	35	7	M4	30	M20×1.0
RN20-N	11	35	7	M4	30	M20×1.0
RN25	15	43	10	M6	35	M25×1.5
RN25-N	15	43	10	M6	35	M25×1.5
RN30	20	48	14	M6	40	M30×1.5
RN30-N	20	48	14	M6	40	M30×1.5
RN35	21	60	14	M6	50	M35×1.5
RN35-N	21	60	14	M6	50	M35×1.5
RN40	25	62	18	M6	50	M40×1.5
RN40-N	8	62	18	M6	50	M40×1.5

▶ RN

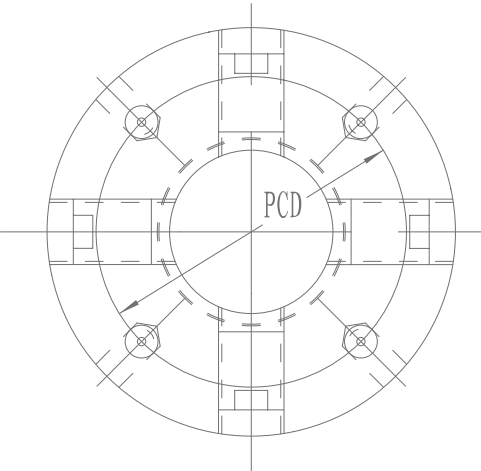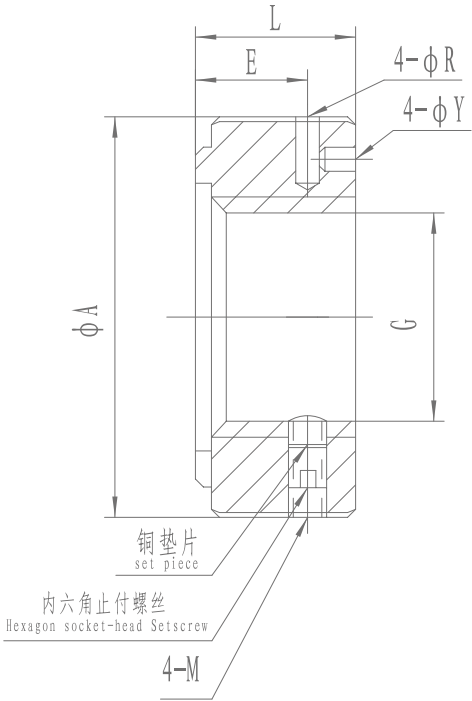



型号 Model No.	部品名称 Part name	数量 Qty
6	锁固螺帽 /Lock nut	1 组 /1 set
7	内六角止付螺丝付铜片 / Hexagon socket-head Setscrew(with set piece)	2

型号 Model No.	L	E	A	M	Y	R	PCD	G	扳手 SPANNER
RN17	18	10	37	M6	4.3	4	27	M17×1.0	ZL020
RN17-N	18	10	37	M6	4.3	4	27	M17×1.0	ZL020
RN20	18	10	40	M6	4.3	4	30	M20×1.0	ZL020
RN20-N	18	10	40	M6	4.3	4	30	M20×1.0	ZL020
RN25	20	11	45	M6	4.3	4	30	M25×1.5	ZL025
RN25-N	20	11	45	M6	4.3	4	30	M25×1.5	ZL025
RN30	20	11	50	M6	4.3	5	40	M30×1.5	ZL035
RN30-N	20	11	50	M6	4.3	5	40	M30×1.5	ZL035
RN35	22	12	55	M6	4.3	5	45	M35×1.5	ZL035
RN35-N	22	12	55	M6	4.3	5	45	M35×1.5	ZL035
RN40	22	12	60	M6	4.3	5	50	M40×1.5	ZL040
RN40-N	22	12	60	M6	4.3	5	50	M40×1.5	ZL040

螺杆、螺母支撑座


螺杆、螺母支撑座

▶ MC

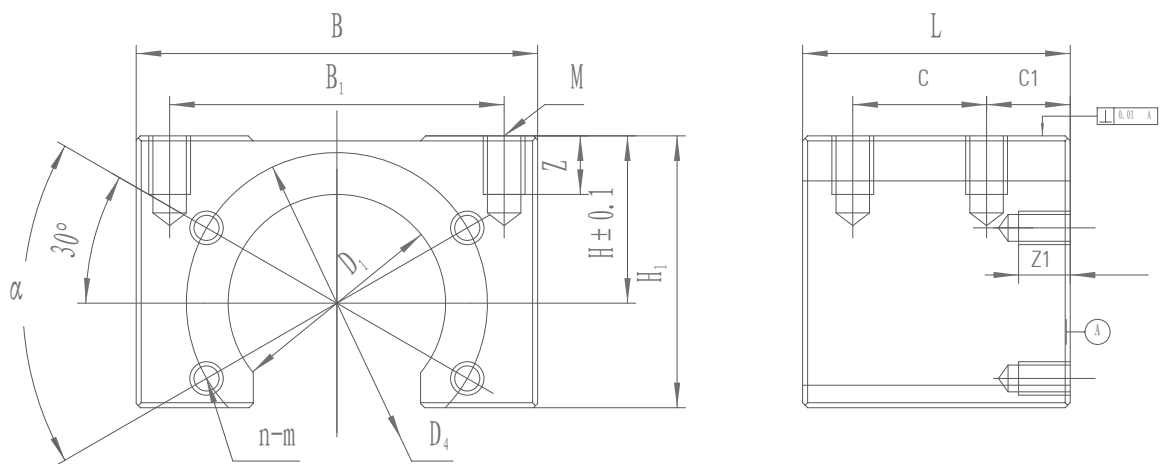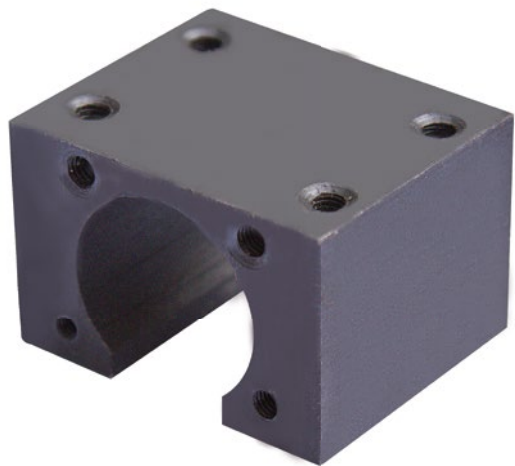

螺母座 型号	螺母座尺寸														
	D1	L	B	D4	m	n	α	H	H1	Z1	B1	C	C1	M	Z
MC1004	26.4	32	48	36	4	4	60	20	32.5	7	40	16	10	5	10
MC1205	30.4	36	60	40	4	4	60	21	37	7	47	24	6	6	12
MC1408	34.4	38	60	45	5	4	60	21.5	37	7	50	20	10	6	12
MC2010	46.4	50	86	59	6	4	60	31	54	10	70	30	10	10	20
MC20120	39.4	40	86	59	6	4	60	28	51	10	70	24	8	10	20

▶ MGD

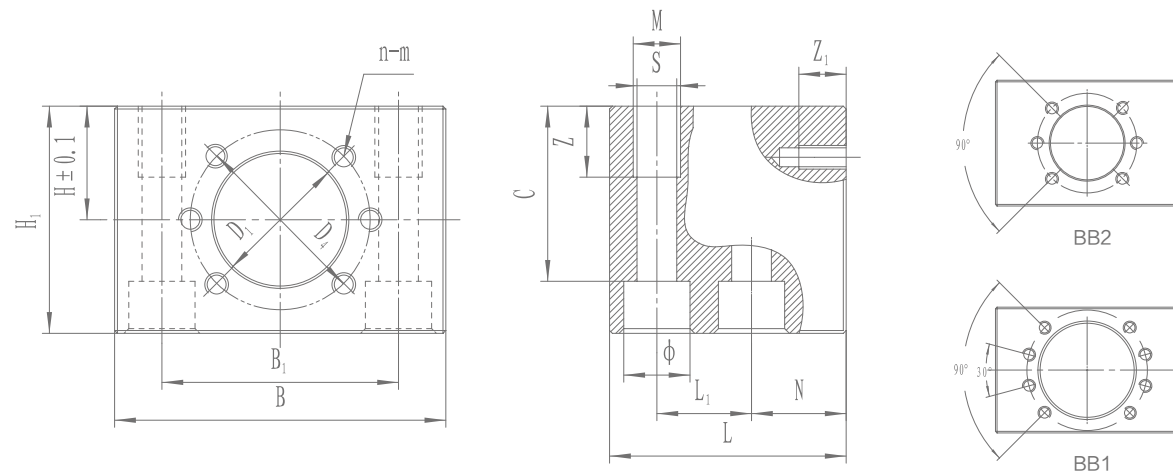


螺母座 型号	螺母座 连接尺寸标准	参考编号 Rexroth	螺母座尺寸																	
			D1	L	B	D4	m	Z1	n	孔布局	H	H1	B1	L1	N	M	Z	S	φ	C
MGD12	DIN 69051 Part 5	R1506 000 50	24.4	35	50	32	M4	8	6	BB2	18	36	35	16	11	M6	10	5.2	9.5	27
MGD16		R1506 100 50	28.4	50	70	38	M5	10	6	BB2	24	48	50	20	20	M10	15	8.4	14	37
MGD20		R1506 200 50	36.4	55	75	47	M6	11	6	BB2	28	56	55	23	22	M10	15	8.4	14	45
MGD25		R1506 300 50	40.4	55	80	51	M6	11	6	BB2	30	60	60	23	22	M10	15	8.4	14	49
MGD32		R1506 400 50	50.4	70	100	65	M8	14	6	BB2	35	70	75	30	27	M16	20	13	20	52
MGD40		R1506 500 50	63.4	80	120	78	M8	17	8	BB1	42	84	90	35	31	M18	25	15	23	66
MGD50		175	75.4	95	140	93	M19	17	8	BB1	48	96	110	45	34	M20	30	17	26	75

螺杆、螺母支撑座


螺杆、螺母支撑座

▶ MGS

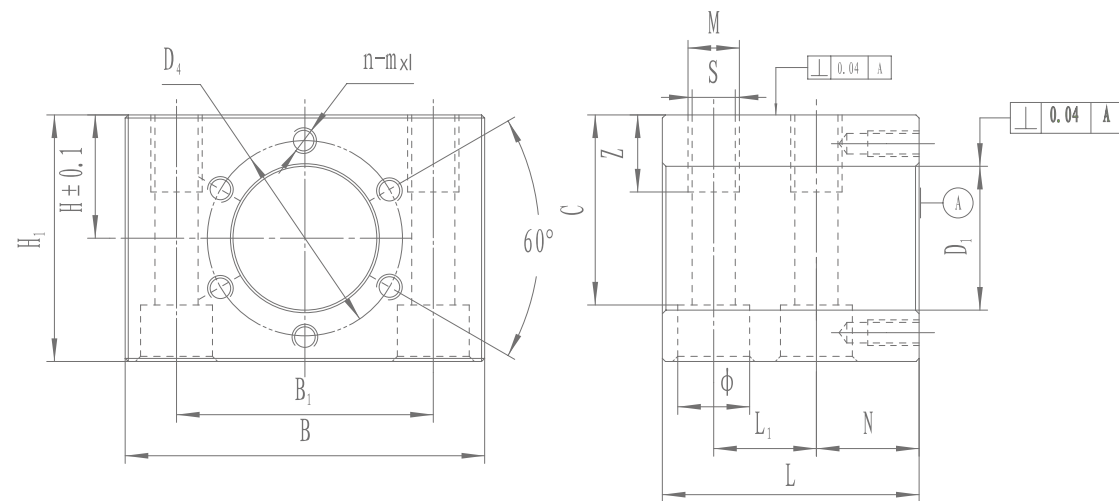

螺母座 型号	参考编号 Rexroth	螺母座尺寸（备注：对或割成开口式插管凸出式滚珠螺母，客户可根据需要将螺母座自行割出避空槽）																
		D1	L	B	D4	m	l	n	H	H1	B1	L1	N	M	Z	S	Φ	C
MGS20	R1506 100 20	34.4	40	75	4z	M5,M6	10	6	32	62	56	20	10	M10	15	8.4	14	51
MGS25	R1506 200 20	40.4	40	65	50	M4,M5,M6	10	6	34	65	63	20	10	M10	15	8.4	14	54
MGS32-1	R1506 300 20	48.4	50	95	60	M4,M5,M6	10	6	38	75	72	26	12	M12	15	10.5	17.5	61
MGS32-2	R1506 400 20	66.4	60	105	68	M6	12	6	42	82	82	30	15	M16	20	13	20	64
MGS40-1	R1506 400 21	63.4	65	120	78	M8	14	6	50	98	93	35	15	M18	25	15	23	79.5
MGS40-2	R1506 500 21	72.4	60	140	90	M10	18	6	58	113	108	46	17	M20	30	17	26	92
MGS50	R1506 500 20	68.4	65	130	82	M8	14	6	52	101	100	35	15	M18	30	15	23	82.5


▶ NH

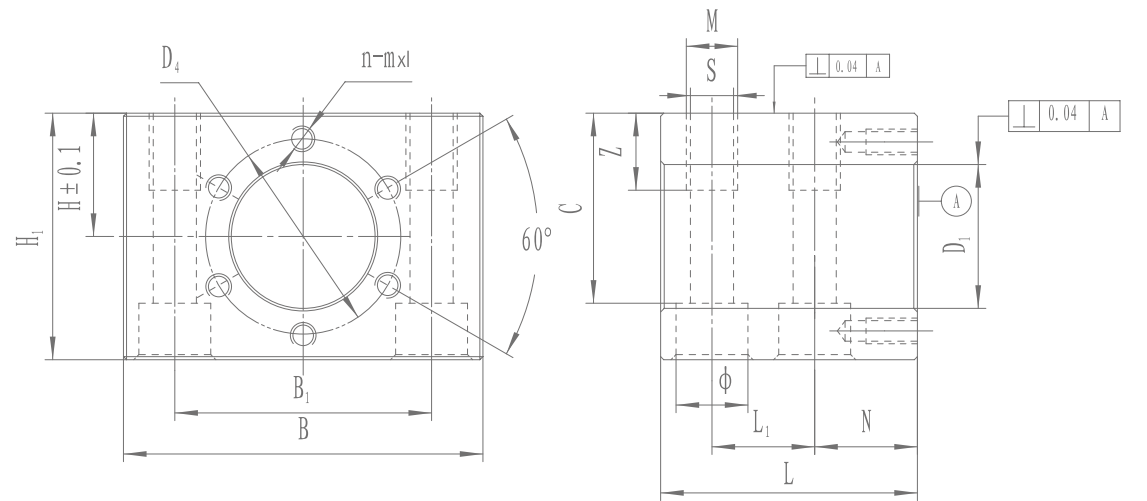


螺母座 型号	螺母座尺寸																
	D1	L	B	D4	m	l	n	H	H1	B1	L1	N	M	Z	S	Φ	C
NH32A	48.4	64	95	60.5	M5	10	6	39	78	70	30	20	M16	25	14	22	62
NH32B	54.4	84	110	70	M8	16	6	46	92	82	50	20	M16	25	14	22	76
NH32C	58.4	64	105	71	M6	12	6	43	86	78	30	20	M16	25	14	22	70
NH32F	74.4	84	130	90	M8	16	6	56	112	100	44	25	M16	25	14	22	96
NH40A	58.4	80	114	72	M8	16	6	46	92	86	40	25	M18	27	15.5	25	74
NH40B	62.4	82	120	82	M10	20	6	53	106	90	36	30	M18	27	15.5	25	88
NH40C	67.4	80	124	83	M8	16	6	52	104	94	35	30	M18	27	15.5	25	86
NH40F	82.4	95	146	102	M10	20	6	64	128	116	50	30	M18	27	15.5	25	110
NH50A	74.4	100	132	92	M10	20	6	59	118	100	48	35	M20	30	17.5	28	98
NH50B	80.4	90	140	96	M8	16	6	59	118	108	38	35	M20	30	17.5	28	98
NH50D	94.4	100	160	113	M10	20	6	69	138	128	48	35	M20	30	17.5	28	118

▶ NH

▶ BK

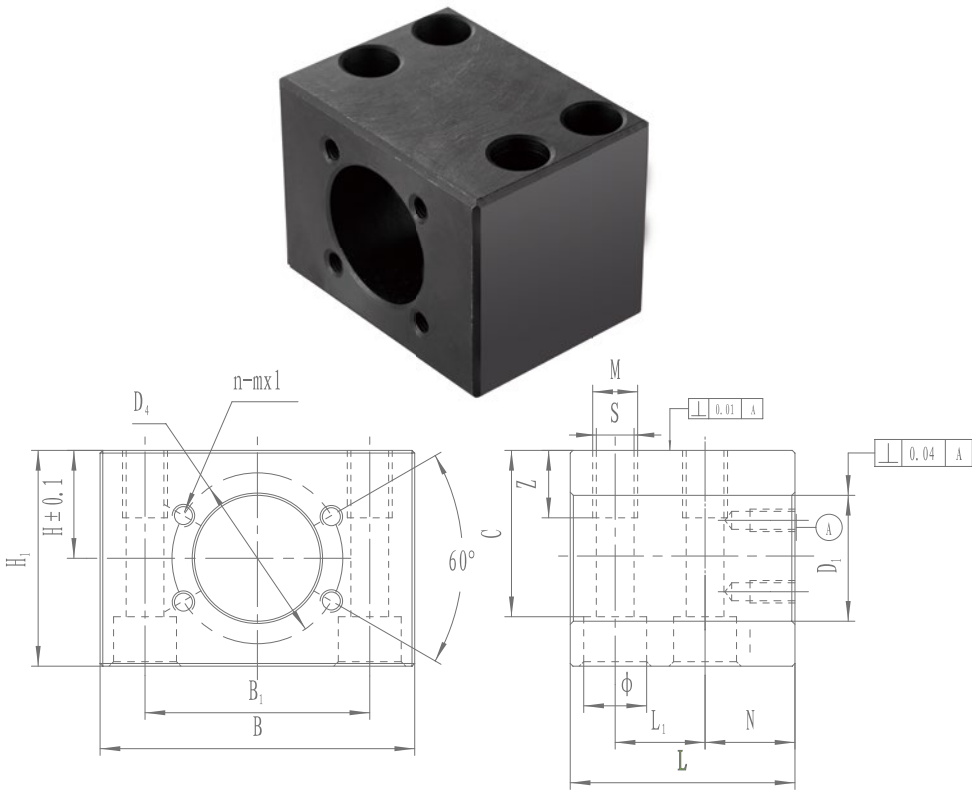


螺母座 型号	螺母座尺寸																
	D1	L	B	D4	m	l	n	H	H1	B1	L1	N	M	Z	S	Φ	C
NH12A	30.4	40	58	40	M4	12	4	19	38	44	18	15	M8	10	6.8	11	32
NH16A	30.4	45	60	39	M4	8	4	22	44	44	22	15	M10	15	8.5	14	36
NH16B	32.4	40	64	42	M4	8	4	20	40	48	16	15	M10	15	8.5	14	32
NH16C	40.4	46	68	51	M5	10	4	22	50	52	18	20	M10	15	8.5	14	42
NH20A	35.4	56	70	46	M5	10	4	24	48	52	28	20	M10	15	8.5	14	40
NH20B	40.4	46	72	51	M5	10	4	27	54	56	18	20	M10	15	8.5	14	46
NH20C	44.4	50	76	55	M5	10	4	29	58	60	22	20	M10	15	8.5	14	50
NH20D	46.4	56	80	59	M5	10	4	30	60	64	28	20	M10	15	8.5	14	52
NH25A	40.4	56	74	51	M5	10	4	25	50	56	28	20	M10	15	8.5	14	42
NH25B	43.4	50	78	55	M5	10	4	28	56	60	20	20	M10	15	8.5	14	46
NH25C	46.4	56	78	57	M5	10	4	28	56	60	26	20	M10	15	8.5	14	46
NH25D	50.4	50	84	61	M5	10	4	31	62	68	20	20	M10	15	8.5	14	52
NH25E	58.4	70	96	71	M6	12	4	35	70	76	40	20	M10	15	8.5	14	60
NH25F	60.4	75	116	78	M8	16	4	37	74	84	46	20	M10	15	8.5	14	64
NH32D	58.4	68	112	73.5	M8	16	4	39	78	84	30	24	M16	25	14	22	62
NH32E	68.4	70	124	84.5	M8	16	4	42	84	96	30	25	M16	25	14	22	70
NH40D	73.4	76	138	93	M10	20	4	45	90	110	32	30	M18	27	15.5	25	72
NH40E	76.4	80	138	96	M10	20	4	50	100	110	35	30	M18	27	15.5	25	82
NH50C	90.4	80	160	112	M12	22	4	55	110	128	38	35	M20	30	17.5	28	90

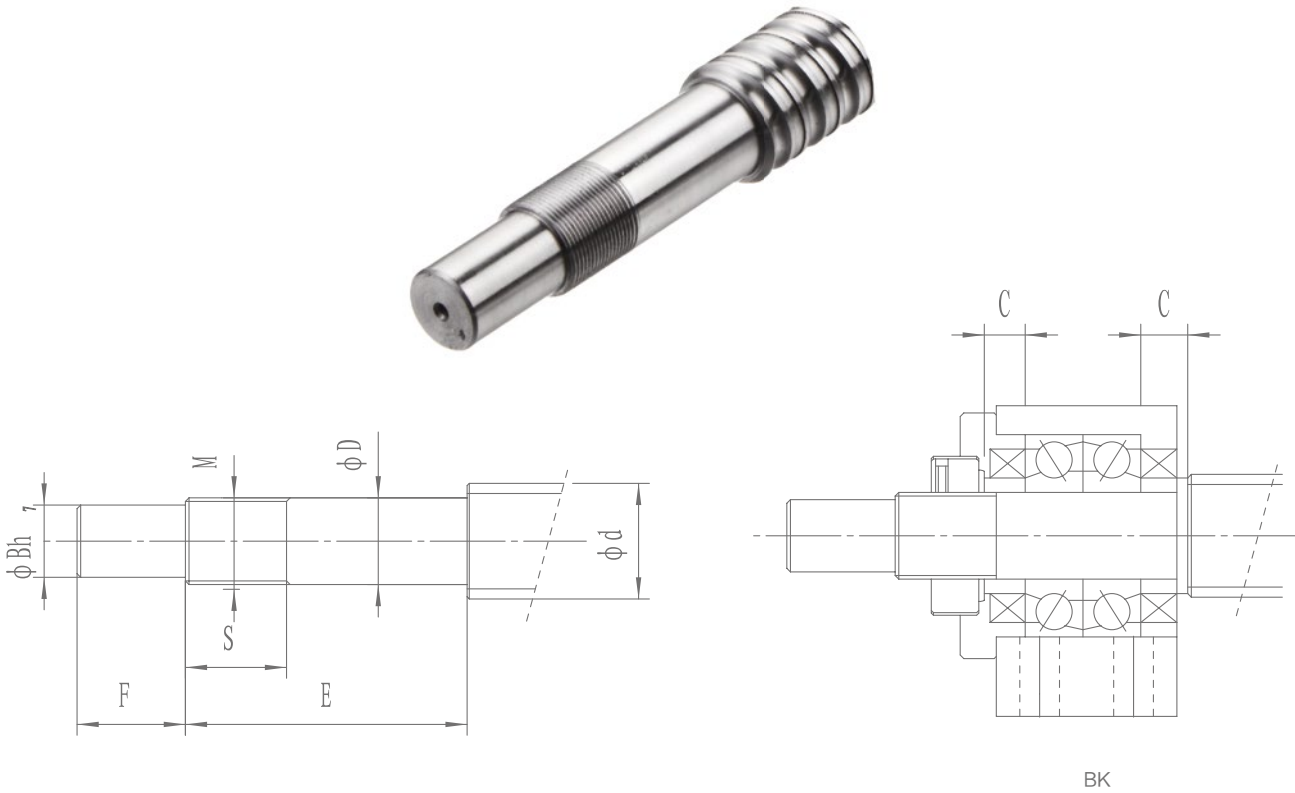


型号 Support unit model No.	滚珠螺杆轴外径 Shaft support portion OD	轴段部外径 Shaft support portion OD				公称螺纹 Metric screw thread		套筒长度 Metric screw thread
BK 型 Type BK	d	D	B	E	F	M	S	C
BK10	12/14/15	10 ^{-0.005 -0.012}	8	36	15	M10×1	16	5.5
BK12	14/15/16	12 ^{-0.005 -0.012}	10	36	15	M12×1	14	5.5
BK15	18/20	15 ^{-0.005 -0.014}	12	40	20	M15×1	12	6
BK17	20/25	17 ^{-0.005 -0.014}	15	53	23	M17×1	17	7
BK20	25/28	20 ^{-0.005 -0.014}	17	53	25	M20×1	15	8
BK25	32/36	25 ^{-0.005 -0.014}	20	65	30	M25×1.5	18	9
BK30	36/40	30 ^{-0.005 -0.014}	25	72	38	M30×1.5	25	9
BK35	45	35 ^{-0.005 -0.014}	30	81	45	M35×1.5	28	12
BK40	50	40 ^{-0.005 -0.014}	35	93	50	M40×1.5	35	15

FK/EK/AK

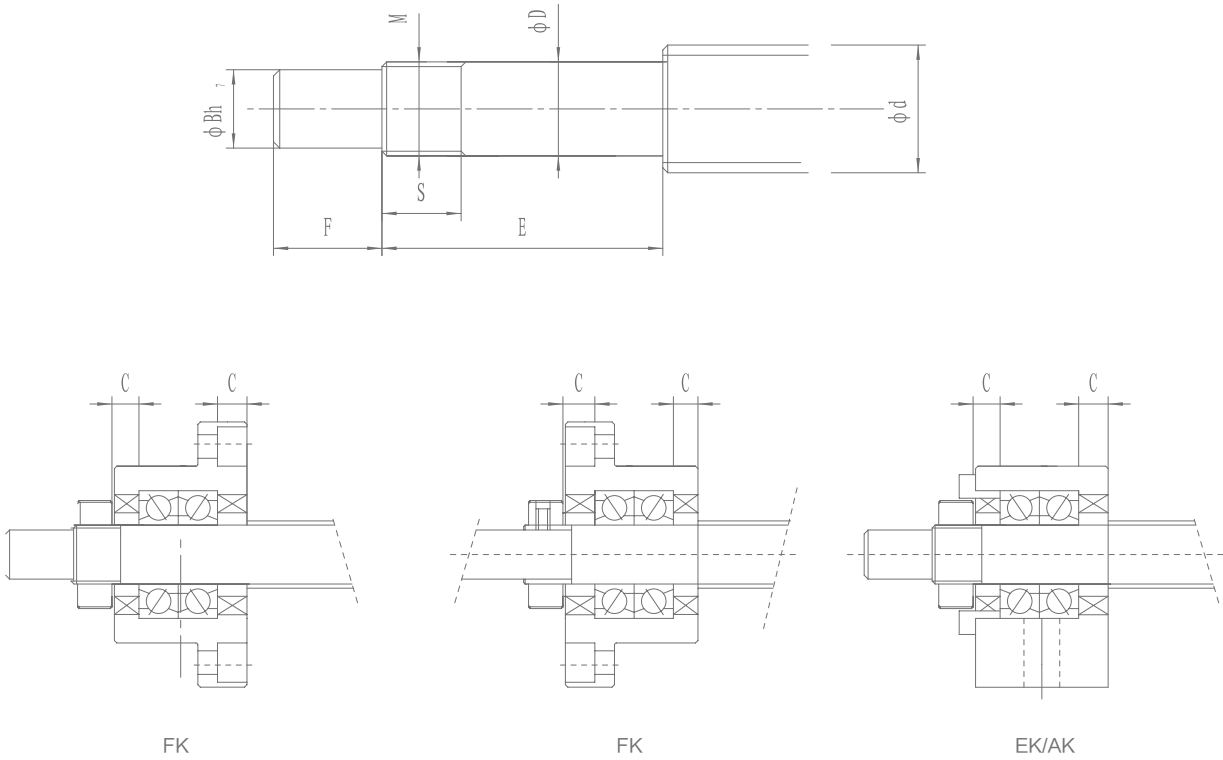

型号 Support unit model No.			滚珠螺杆轴外径 Shaft support portion OD	轴段部外径 Shaft support portion OD				公称螺纹 Metric screw thread			套筒长度 Metric screw thread
FK 型 Type FK	EK 型 Type EK	AK 型 Type AK	d	D	B	E	F	M	S	C	
FK05	EK05	-	8	5 ^{-0.005 -0.012}	4	25	6	M5×0.5	7	3.5	
FK06	EK06	-	8	6 ^{-0.005 -0.012}	4	28	8	M6×0.75	8	5	
FK08	EK08	-	10/12	8 ^{-0.005 -0.012}	6	32	9	M8×1	10	5.5	
FK10	EK10	AK10	12/14/15	10 ^{-0.005 -0.012}	8	36	15	M10×1	11	5.5	
FK12	EK12	AK12	14/15/16	12 ^{-0.005 -0.012}	10	36	15	M12×1	11	5.5	
FK15	EK15	AK15	18/20	15 ^{-0.005 -0.012}	12	47	20	M15×1	13	10	
FK17	-	-	20/25	17 ^{-0.005 -0.012}	15	58	23	M17×1	15	10	
FK20	EK20	AK20	25/28/30	20 ^{-0.005 -0.012}	17	62	25	M20×1	17	11	
FK25	-	-	30/32/36	25 ^{-0.005 -0.012}	20	76	30	M25×1.5	20	15	
FK30	-	-	36/40	30 ^{-0.005 -0.012}	25	72	38	M30×1.5	25	9	

FF,EF,BF,AF 型

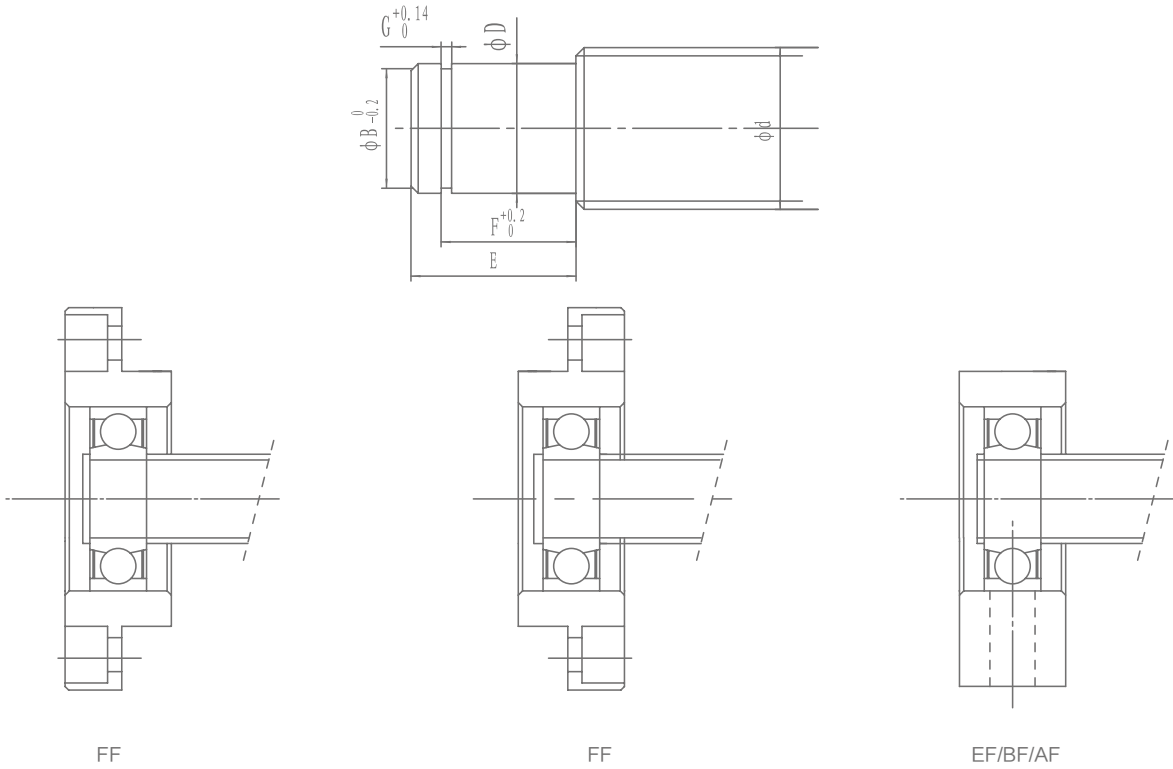

型号 Support unit model No.				滚珠螺杆轴外径 Shaft support portion OD	轴段部外径 Shaft support portion OD				
FK 型 Type FK	EK 型 Type EK	BF 型 Type BF	AK 型 Type AK	d	D	E	B	F	G
FF06	EF06	-	-	8	6 ^{-0.005 -0.012}	9	5.7	6,8	0.8
-	EF08	-	-	10	6 ^{-0.005 -0.012}	9	5.7	6.8	0.8
FF10	EF10	BF10	AF10	12/14/15	8 ^{-0.005 -0.012}	10	7.6	7.9	0.9
FF12	EF12	BF12	AF12	14/15/16	10 ^{-0.005 -0.012}	11	9.6	9.15	1.15
FF15	EF15	BF15	AF15	18/20	15 ^{-0.005 -0.012}	13	14.3	10.15	1.15
FF17	-	BF17	-	20/25	17 ^{-0.005 -0.012}	16	16.2	13.35	1.15
FF20	EF20	(BF20)Note	AF20	25/28/30	20 ^{-0.005 -0.012}	19(16)	19	15.35(13.35)	1.35
FF25	-	BF25	-	30/32/36	25 ^{-0.005 -0.012}	20	23.9	16.35	1.35
FF30	-	BF30	-	36/40	30 ^{-0.005 -0.012}	21	28.6	17.75	1.75
-	-	BF35	-	40/45	35 ^{-0.005 -0.012}	22	33	18.75	1.75
-	-	BF40	-	50	40 ^{-0.005 -0.012}	23	38	19.95	1.95