
COUPLING

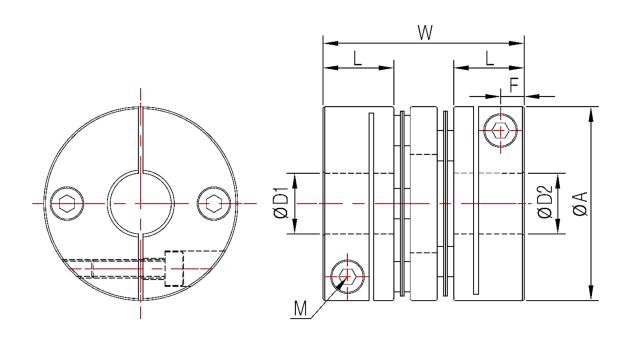

Part NO.	Dimension(mm)						Tightening Screw		Rated Torque	Max Torque	Max. RPM	Moment of inertia	Torsional Stiffness	Angle	Parallel	End play	Mass
	ØD1	ØD2	ØΑ	L	W	F	Size M	Torque N-m	N-m	N-m	min ⁻¹	kg.m²	N.m/rad	o	mm	±mm	g
MDW-32C-10-14	10	14	31.8	11.6	38	3.9	M3	2	3	6	15000	8.8x10 ⁻⁶	1300	2	0.15	0.2	60

 $[\]ensuremath{^{*}}$ The Max. RPM did not take into account the dynamic balance.

 $[\]ensuremath{^{*}}$ Mass and moment of inertia are calculated based on maximum inner diameter.

 $[\]ensuremath{^*}$ We encourage h7 for tolerance of attachment axis.